


BELLA VISTA

ULTRA NARROW

CANOPYLESS TIERED ULTRA NARROW




PROFILE mm

A = 273 H = 2050
 B = 750 P = 193
 C = 400 S = 300
 D = 320 T = 1660

CABINET LENGTH mm

BVUN1250M	1250
BVUN1875M	1875
BVUN2500M	2500
BVUN3750M	3750

CANOPYLESS TIERED REDUCED HEIGHT ULTRA NARROW



PROFILE mm

A = 273 P = 193
 B = 750 S = 300
 C = 400 T = 1210
 D = 320 R = 66
 H = 1600

TOP PIPE COVER OPTIONAL

BVRUN1250M	1250
BVRUN1875M	1875
BVRUN2500M	2500
BVRUN3750M	3750

	MECHANICAL	ELECTRONIC	MECHANICAL	ELECTRONIC	DIGITAL TOP MOUNT	LIQUID & SUCTION	625MM SOLID OR PERSPEX	1250MM SOLID	SHELF	FLAT BASE	ACCESSORIES	
											PERSPEX PRODUCT DIVIDERS	TICKET STRIP FA319
EXPANSION VALVE												
CONTROLS												
TEMPERATURE DISPLAY												
SHUT OFF VALVE												
SHELVES												
50MM RISERS												

NB: ● Standard Cabinet Specification includes: Mechanical expansion valve, Liquid & suction shut off valves, RDM Electronic controls, Digital temperature display, Shelving as illustrated above & GB 3000 bumper, where applicable.
 ○ Optional Cabinet Specifications.
 Remote Case Only.

Standard Temperature Specification Cabinet Extraction Ratings and Evaporating Temperatures

CABINET MODEL	DESCRIPTION	LENGTH	EVAP. TEMP (°C)	DUTY TO EN441 AT ISO3 (KW)	STANDARDS
BVUN1250M	NO CANOPY CHILLER, ULTRA NARROW BASE	1250	-7	1.86	<p>Note 1. extraction rate calculated at 25°C 60% RH. Revised figures available on request for operation in typical store conditions. Note 2. Cabinets tested in accordance with EN441 Parts 1 to 12. Note 3. In line with our policy of continuous product improvement, George Barker and Company reserve the right to alter features and specifications at any time without notice.</p>
BVUN1875M	NO CANOPY CHILLER, ULTRA NARROW BASE	1875	-7	2.98	
BVUN2500M	NO CANOPY CHILLER, ULTRA NARROW BASE	2500	-7	3.72	
BVUN3750M	NO CANOPY CHILLER, ULTRA NARROW BASE	3750	-7	5.14	
BVRUN1250M	NO CANOPY CHILLER, ULTRA NARROW BASE	1250	-7	1.40	
BVRUN1875M	NO CANOPY CHILLER, ULTRA NARROW BASE	1875	-7	2.24	
BVRUN2500M	NO CANOPY CHILLER, ULTRA NARROW BASE	2500	-7	2.80	
BVRUN3750M	NO CANOPY CHILLER, ULTRA NARROW BASE	3750	-7	3.86	

Calculations determined by method recommended by the BRA. Duties based upon 24 hour run.

CUSTOMER SERVICE • INSTALLATION • PROJECT MANAGEMENT • REFRIGERATED DISPLAY • SHOPFITTING (ALSER) • SYSTEM DESIGN



Date of first issue Oct 2004
 DP 00006G00

George Barker and Company (Leeds) Limited
 Highfield Works, Highfield Road,
 Bradford BD10 8RF

Telephone: 01274 703200

Fax: 01274 615916


Email: sales@georgebarker.co.uk



www.georgebarker.co.uk

BELLA VISTA

ULTRA NARROW

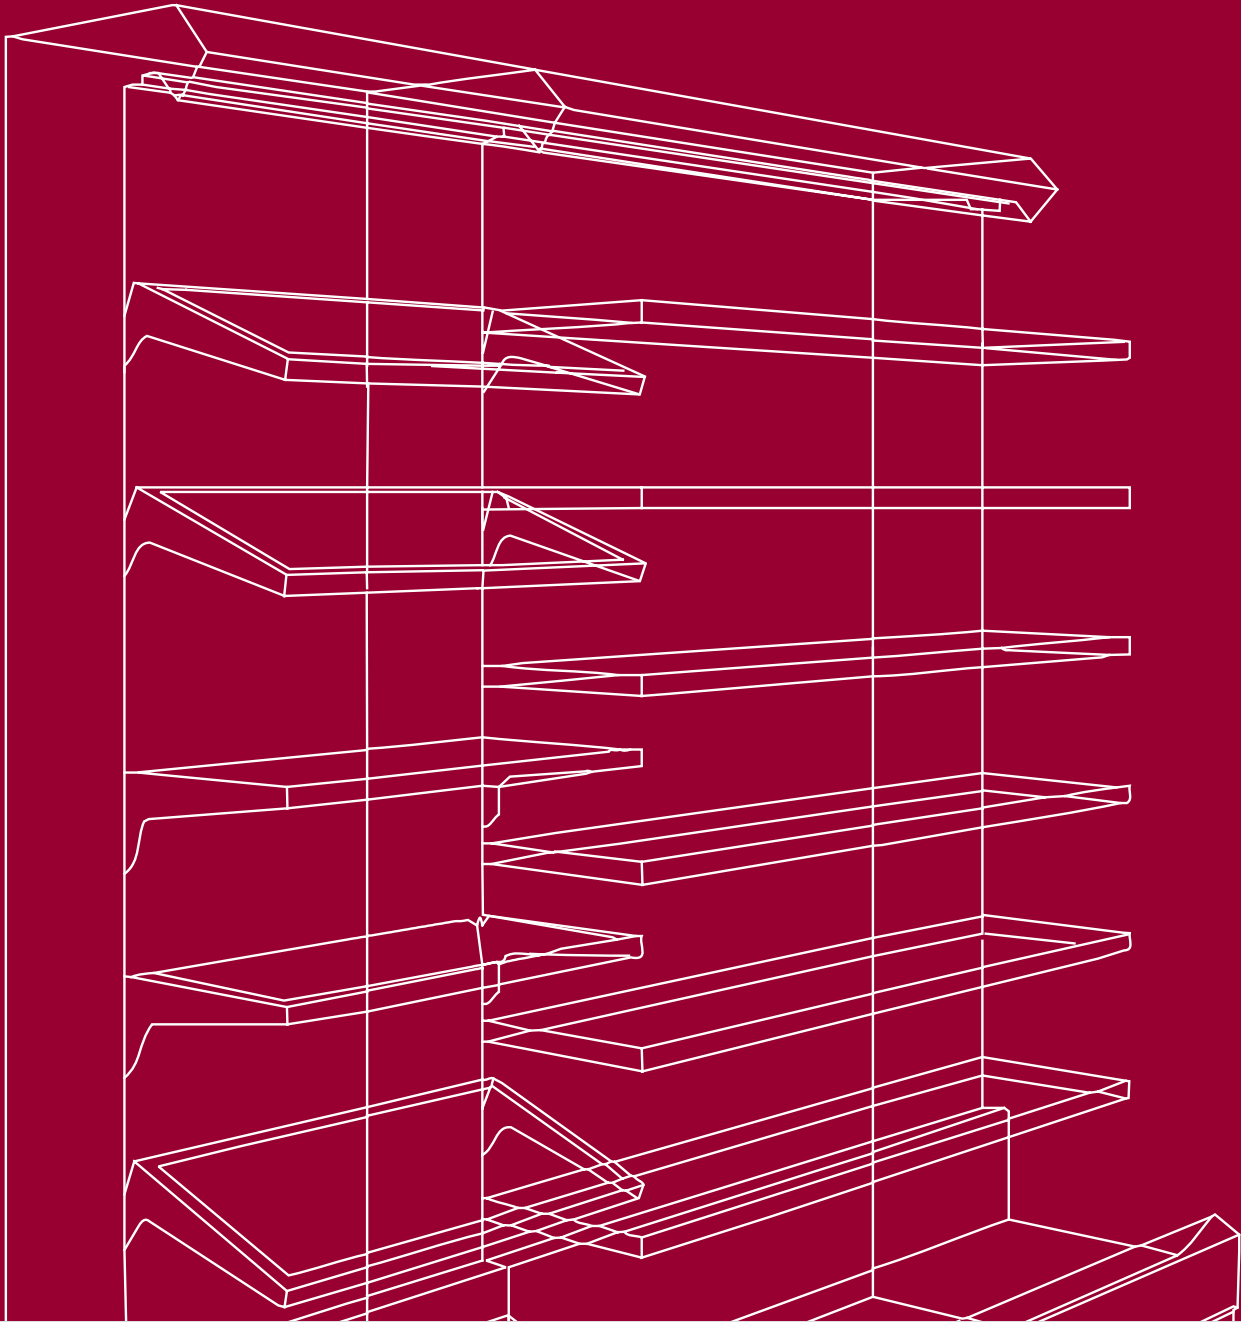






BELLA VISTA

ULTRA NARROW




FEATURES

-  VARIABLE SHELF POSITIONING
-  ULTRA NARROW TERMINAL END
-  OPTIONAL PERSPEX SHELVING
-  TWO HEIGHT OPTIONS

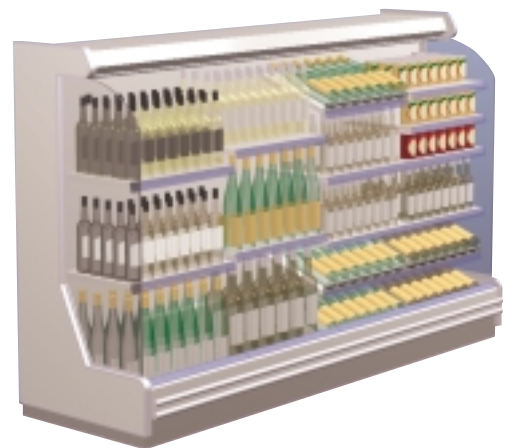



FOR THE PRESERVATION OF DAIRY • WRAPPED PRODUCTS • PROVISIONS • PRODUCE • CONVENIENCE

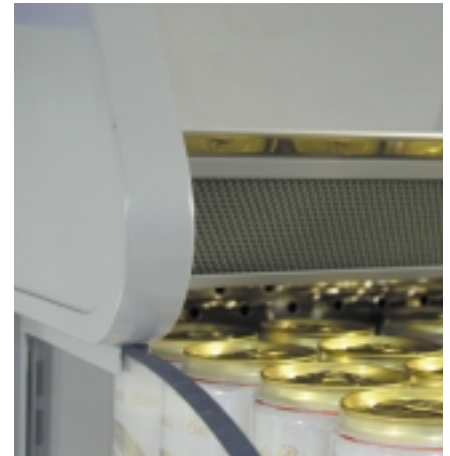



**ULTRA NARROW FOR EASE OF INSTALLATION
LESS INTRUSION ON VALUABLE FLOOR SPACE**

BENEFITS

-  FLEXIBILITY
-  SPACE SAVING
-  PRODUCT VISIBILITY
-  A MERCHANDISING TOOL



FOR THE PRESERVATION OF DAIRY • WRAPPED PRODUCTS • PROVISIONS • PRODUCE • CONVENIENCE

